RT 1045L

ROUGH TERRAIN CRANE 44 T CAPACITY





- 44 t lifting capacity
- 37,4 m max boom length
- ▶ 39,5 m max tip height main boom
- 47,5 m max tip height with additional 8 m boxed jib

EASY TO HANDLE

Easy transportability and maneuverability:

- Compact: only 2.53 m width
- 3 steering modes
- Automatic / manual shift modes

HIGH PERFORMANCES

- Superior load charts and tip heights
- 5-sections hydraulic boom with 2 extension modes: strength, stability
- Low energy consumption Cummins engine 129 kW (V) / 119 kW (IIIA)
- 16.00 (20.5) tires

FULL CONTROL

- 7" full-color display
- Ergonomic electro-proportional joysticks with adjustable responsiveness to operator preferences

GREAT COMFORT, EXCELLENT VISIBILITY


- Extra wide and tiltable cabin with large glass surface. No blind spots.
- 3 working area LED lights outside the cab included

TOP RELIABILITY

- High quality assured, with minimal service needs
- Low operating cost
- T-Link Telematics Platform included

WIDE OPTIONS CHOICE

- Additional boxed jib of 8 m and single sheave
- Auxiliary winch
- Up to 4 cameras for enhanced visibility
- Radio remote control

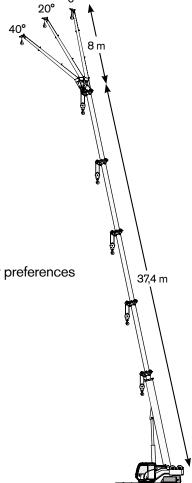







- Cost savings and increased of productivity
- Better management of maintenance and technical assistance
- Fleet control with Geofence
- Improved machine management, statistics and real-time data

KEY APPLICATIONS

The versatility of our rough terrain cranes allow us to cater for a number of applications, including:



OIL & GAS



CONSTRUCTION



MINING



SHIPPING & LOGISTICS



SHIPYARDS



POWER PLANTS



ROADS & RAILWAYS CONSTRUCTION



MILITARY



MATERIAL HANDLING



MOBILE EQUIPMENT COMMISSIONING



GENERAL LIFTING APPLICATIONS



MAINTEINANCE WORKS







TEREX ROUGH TERRAIN CRANES

Terex Italia Srl

Via Cassoletta, 76 - Fraz. Crespellano 40053 Valsamoggia (BO) Italy

Ph: +39 051 6501011 Email: mktg.cranes@terex.com

www.terex.com/rough-terrain-cranes











Brochure Reference: RT-FL-M-E-RT 1045L-01/23